

RMount250 250kg Rubber Mount for 100kg to 250kg GK2107 Shear Beam Load Cells

Shown:- GK2107S2.5 250kg Stainless Steel IP67
Shear Beam Load Cell on GKBP07-01S Stainless Steel
Base Plate with RMount250 Rubber Mount.
{Load Spreading Washers Not Shown}




RMount250 comprises:-

- 1 @ Rubber Mount 50mm Dia x 35mm High
- 1 @ Stud MS/Yellow Zinc M10 to M12 x 35mm long
- 1 @ M12x1.75Px6 Jam Nut ZP
- 1 @ M12 Plain Washer 24mm x 2 ZP
- 1 @ M10 MS/YellowZinc Stud 25mm long
- 2 @ M10x1.5Px8 Nut ZP
- 1 @ M12 2" Large Washer
- 1 @ M10 1.5" Large Washer

LOAD SPREADING WASHERS
WARNING-Rubber Mount **MUST NOT**
be loaded via only the fixing studs. The
load must be transferred to the rubber
mount via the washers provided as shown
or via a large area users bracket.
NOTE ALSO the rubber mounts are not
designed for tensile loads. If uplift is likely
then clearance must be provided and external
uplift stops employed.

User's Mounting Bracket
NOTE:- The bracket can
sit directly on the mount
either with or without the
1.5" load spreading washer
in place. Area of bracket
must be equal or greater
than 1.5" washer to spread
the load over the mount.

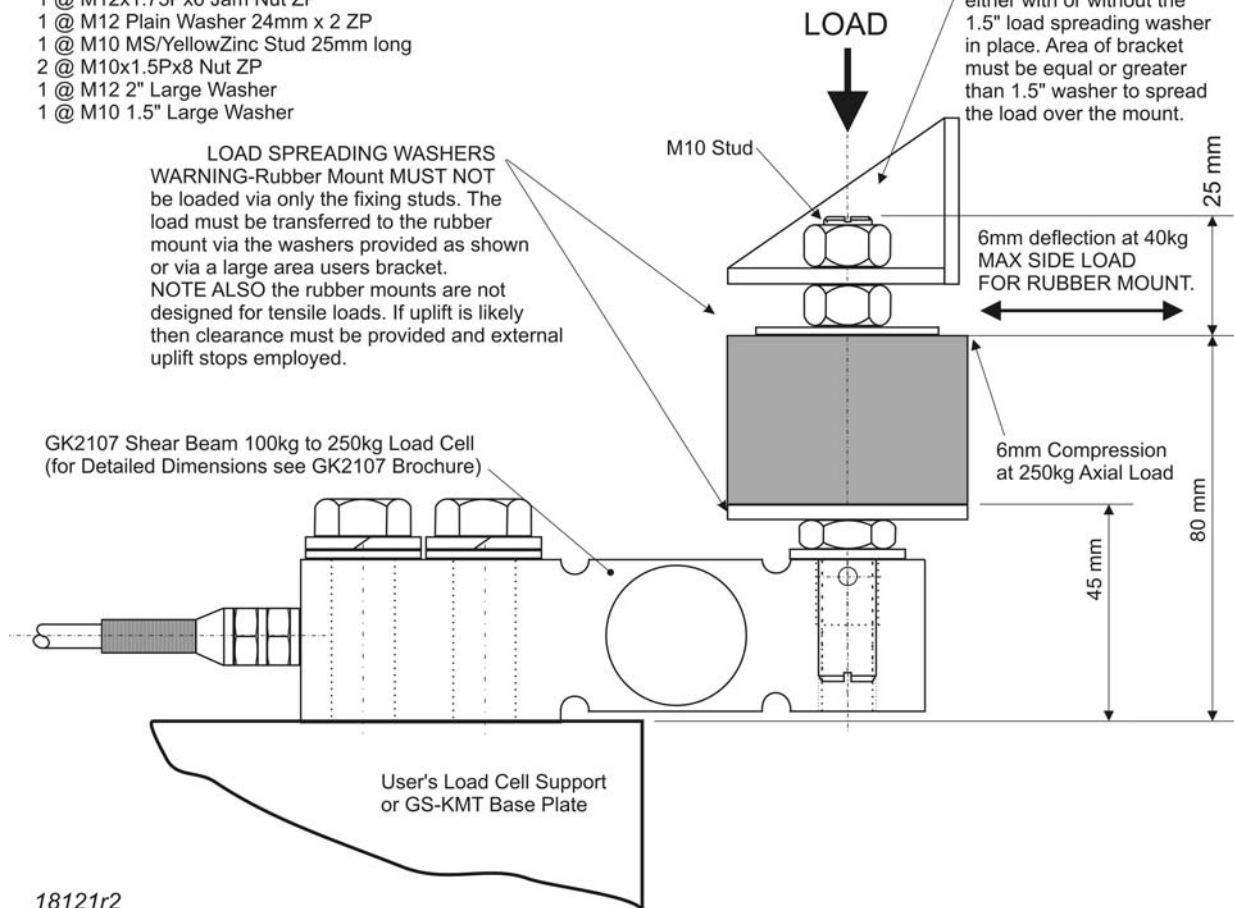

18121r2