


RMOUNT5000 4,500kg Rubber Mount for 5,000kg GK2107 Shear Beam Load Cells

Shown:- GK2107S-50 5,000kg Stainless Steel IP68 Shear Beam Load Cell on GKBP07-05S Stainless Steel Base Plate with RMOUNT5000 Rubber Mount.

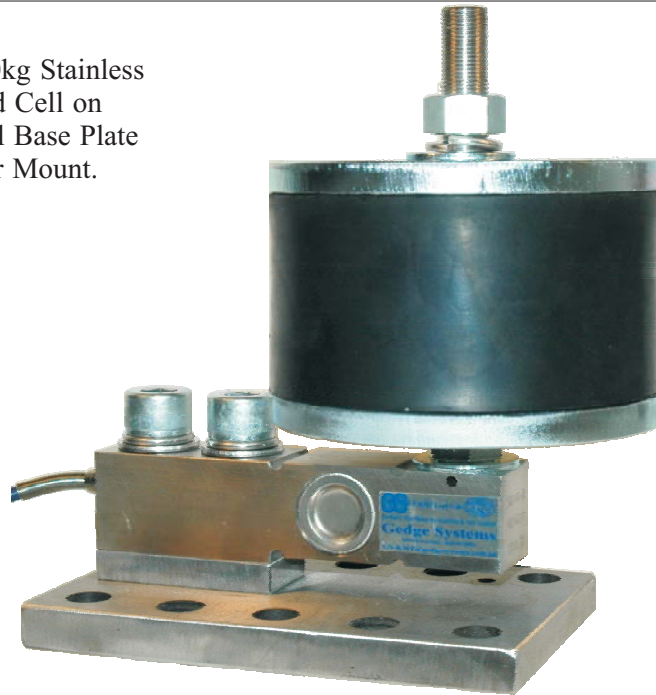


RMOUNT5000 comprises:-

- 1 @ Rubber Mount 150mm Dia x 75mm High
- 2 @ M18x1.5Px71mm Stainless Steel Studs
- 2 @ M18x1.5Px15 Standard Nut ZP
- 2 @ M18 Plain Washer 34mm x 3 ZP
- 1 @ M18 Spring Washer 20mmIDx5mm ZP
- 2 @ Load Spreading Washers 150mmx12mm ZP

User's Mounting Bracket. If bracket covers the entire area of the mount then the 12.5mm load spreading washer is not required.

LOAD SPREADING WASHERS
WARNING-Rubber Mount MUST NOT be loaded via only the fixing studs. The load must be transferred to the rubber mount via the washers provided as shown or via a large area users bracket.
NOTE ALSO the rubber mounts are not designed for tensile loads. If uplift is likely then clearance must be provided and external uplift stops employed.

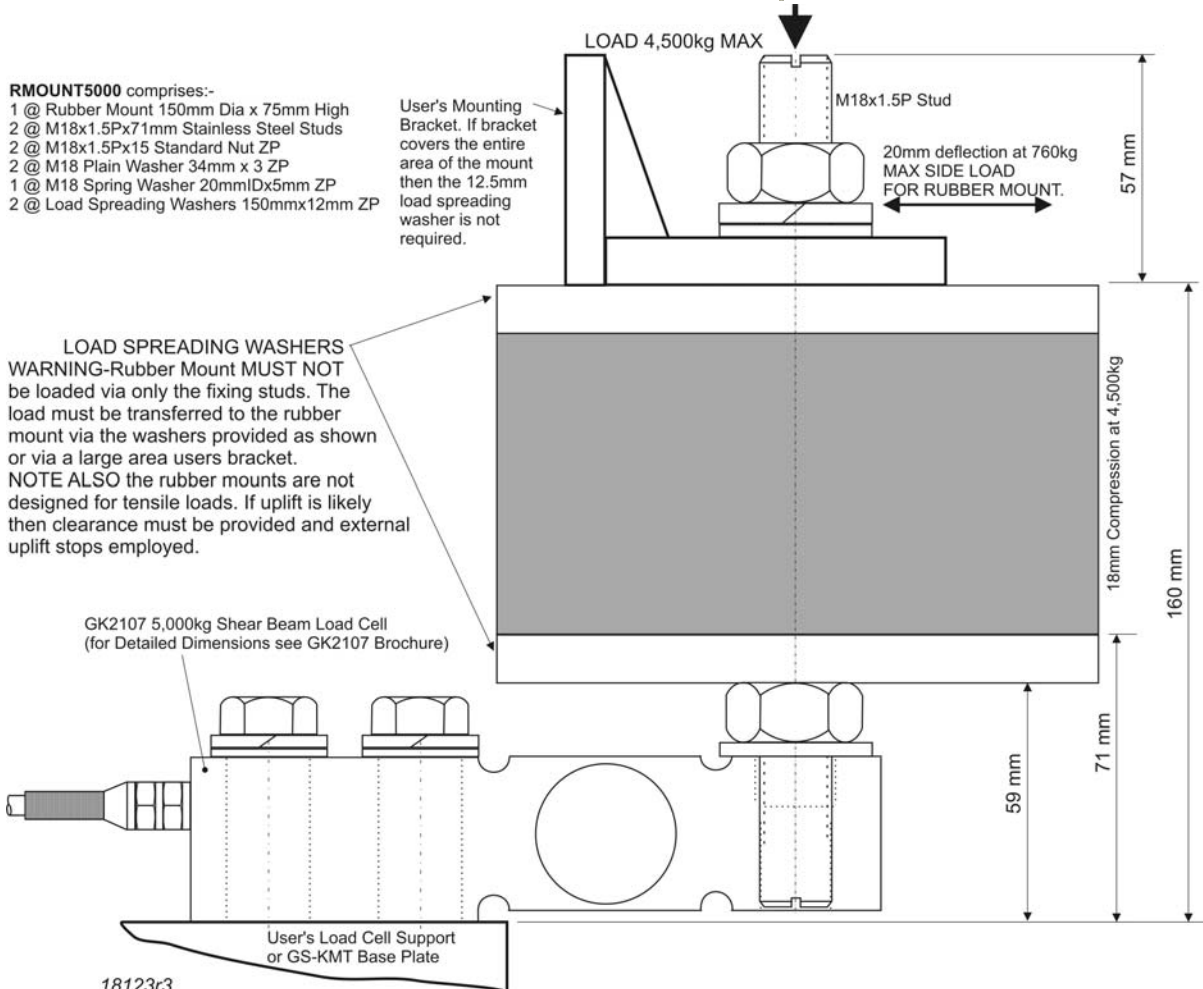

18123r3

Gedge Systems, 488 Church Street, Richmond, Victoria, 3121 Australia

tel +61 3 9429 8396 fax +61 3 9429 8097 web: www.gedgesystems.com.au email: gs-kmt@gedgesystems.com.au

© Copyright 2007 GS Systems Pty Ltd ABN 18 737 137 544 - GS Standard 1 year Warranty - Specification subject to change without notice.